
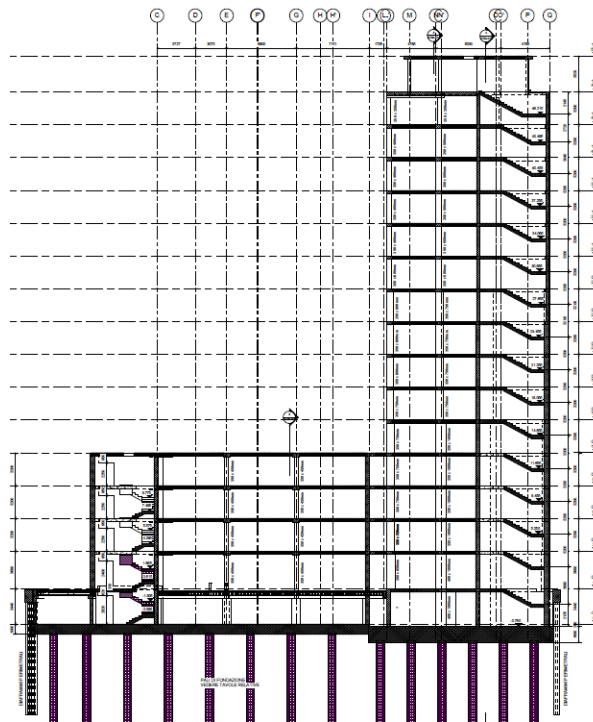
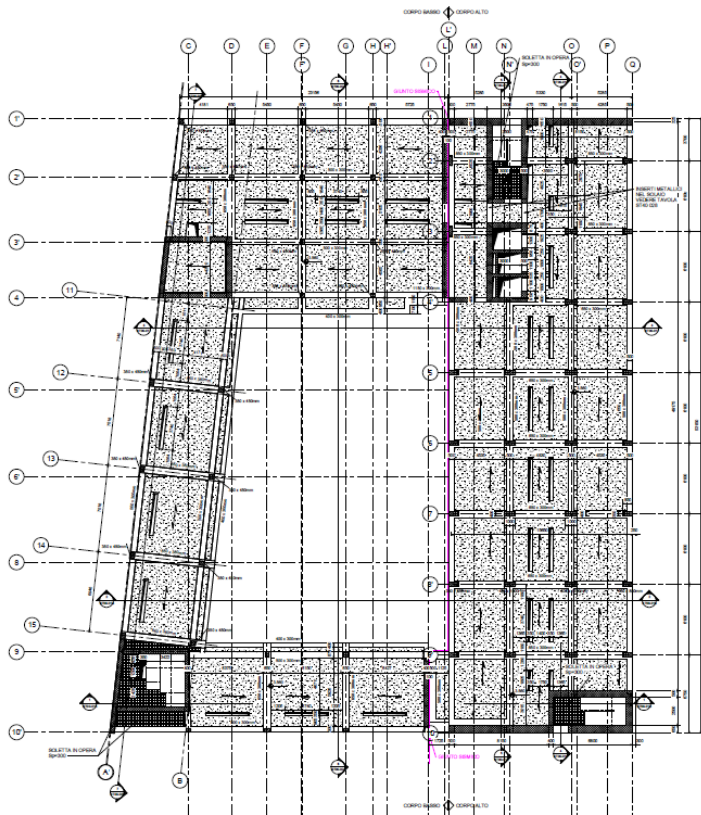


Bologna – Serlio Street Hall of Residence

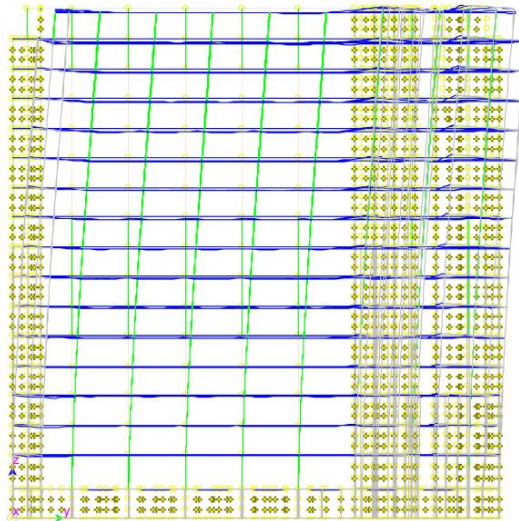

WORK DATA	
Location	Bologna (ITA)
Year	2018 – 2019 under construction
Owner	Fiera 2000 s.r.l.
Client	Open Project
Structural Work cost	€ 6'309'000
Type	New construction
STRUCTURAL DESIGN	
Tender	X
Preliminary	X
Final	X
CHARACTERISTICS	
Plan Area	Tall building: 16x53 = 848m ² Small building: 30x60 = 1600m ²
Storey	Tall building: 17-Small building: 5
Height	Tall building: 52m Small building: 16.7m
Main Structure	Concrete cores and columns. Concrete beams.
Slabs	Precast formwork with cast in situ slab. Lowered ground floor made by precast hollow elements «Spiroll».
Foundation	Concrete Box foundation on piles.